

# MIRA TURN 12,6W LED DIM TO WARM

## SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	12,6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	40 - 1360
LIGHT COLOUR	[K]	1910 - 3000
CRI		>90
BEAM ANGLE	[°]	38 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	93
POWER SUPPLY	[V] [A]	350mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINIUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,43
GROSS WEIGHT	[kg]	0,45
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø94
RECESSED DEPTH (H)	[mm]	110

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

38°

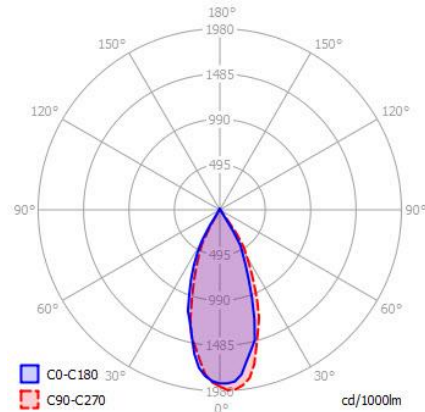


## OPTIONS / OPTIONAL ACCESSORIES


REFLECTOR	[°]	15 / 25 / 60
ACCENT RING		CHROME (default)
ACCENT RING		BLACK
ACCENT RING		WHITE
ACCENT RING		GOLD
ACCENT RING		COPPER
ACCENT RING		MATT CHROME



## CUT OUT DIMENSIONS

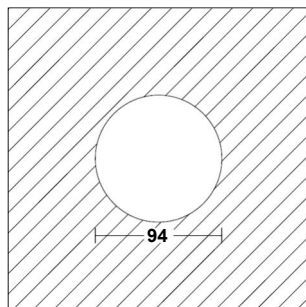

## FIXTURE DIMENSIONS

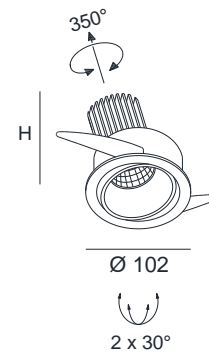

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# MIRA TURN 14W LED

## SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	14
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1550 / 1610
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	38 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	99
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,46
GROSS WEIGHT	[kg]	0,48
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø94
RECESSED DEPTH (H)	[mm]	130

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

38°

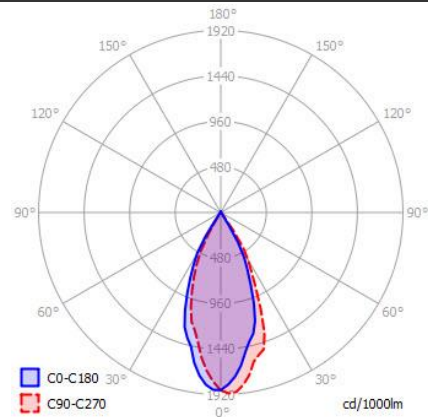


## OPTIONS / OPTIONAL ACCESSORIES



REFLECTOR	[°]	15 / 25
ACCENT RING		CHROME (default)
ACCENT RING		BLACK
ACCENT RING		WHITE
ACCENT RING		GOLD
ACCENT RING		COPPER
ACCENT RING		MATT CHROME



## CUT OUT DIMENSIONS

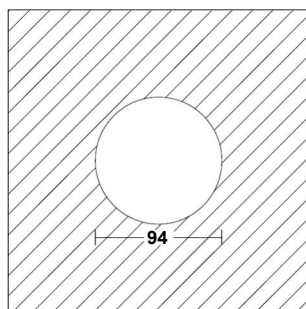

## FIXTURE DIMENSIONS

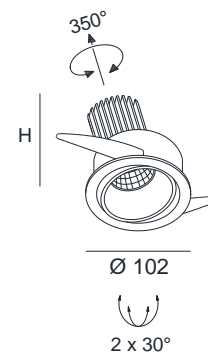

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# MIRA TURN 9,3W LED

## SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1100 / 1150
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	38 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	120
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,42
GROSS WEIGHT	[kg]	0,44
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø94
RECESSED DEPTH (H)	[mm]	105

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

38°

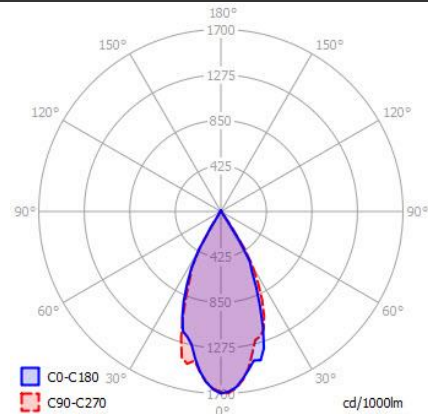


## OPTIONS / OPTIONAL ACCESSORIES


REFLECTOR	[°]	15 / 25 / 60
LENS	[°]	11
ACCENT RING		CHROME
ACCENT RING		BLACK
ACCENT RING		WHITE
ACCENT RING		GOLD
ACCENT RING		COPPER
ACCENT RING		MATT CHROME



## CUT OUT DIMENSIONS

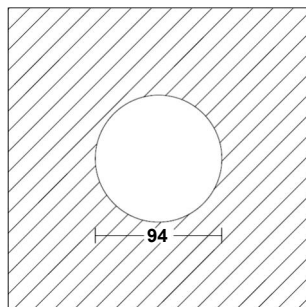

## FIXTURE DIMENSIONS

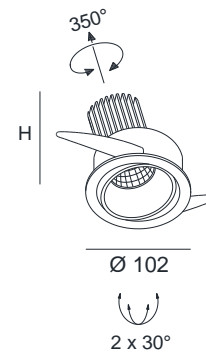

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# MIRA TURN GU10


## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	1xGU10 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		II
NET WEIGHT	[kg]	0,38
GROSS WEIGHT	[kg]	0,40
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø94
RECESSED DEPTH (H)	[mm]	135



## LIGHT DISTRIBUTION (OSRAM LAMP)

36°

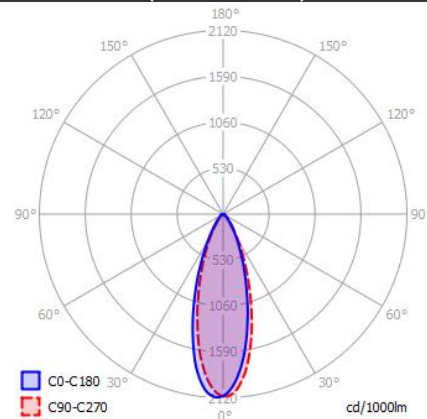


\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES


ACCENT RING	CHROME (default)
ACCENT RING	BLACK
ACCENT RING	WHITE
ACCENT RING	GOLD
ACCENT RING	COPPER
ACCENT RING	MATT CHROME



## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS

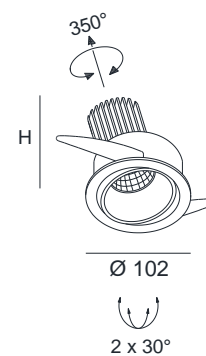

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING