

# MIRA WALLWASHER 12,6W LED DIM TO WARM


## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	12,6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	40 - 1360
LIGHT COLOUR	[K]	1910 - 3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	93
POWER SUPPLY	[V] [A]	350mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,41
GROSS WEIGHT	[kg]	0,43
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø80
RECESSED DEPTH (H)	[mm]	105



## LIGHT DISTRIBUTION


38°

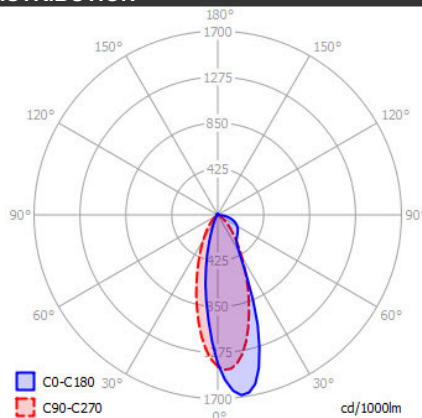

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES


### Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# MIRA WALLWASHER 14W LED


## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	14
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1550 / 1610
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	99
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,44
GROSS WEIGHT	[kg]	0,46
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø80
RECESSED DEPTH (H)	[mm]	125



## LIGHT DISTRIBUTION


38°

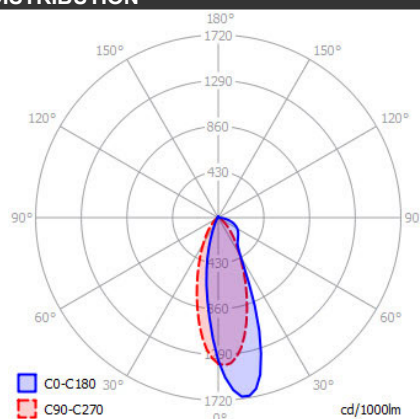

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES


### Colours





white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING


# MIRA WALLWASHER 9,3W LED

## SPECIFICATIONS

<b>MOUNTING</b>		<b>CEILING RECESSED</b>
POWER	[W]	9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1100 / 1150
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	120
<b>POWER SUPPLY</b>		<b>500mA CC</b>
LED-DRIVER	[V] [A]	<b>NOT INCLUDED</b>
DIMMING		<b>SEE DRIVER</b>
THROUGH-WIRING		<b>SEE DRIVER</b>
<b>MATERIAL</b>		<b>ALUMINUM</b>
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,41
GROSS WEIGHT	[kg]	0,43
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø80
RECESSED DEPTH (H)	[mm]	100



## LIGHT DISTRIBUTION

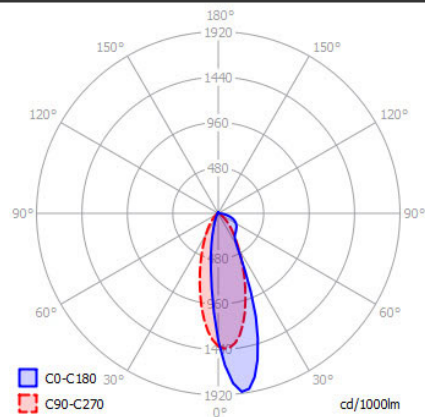


\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES



### Colours



## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS

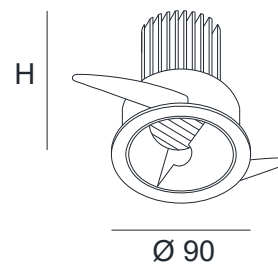

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING


# MIRA WALLWASHER GU10

## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	1xGU10 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		II
NET WEIGHT	[kg]	0,36
GROSS WEIGHT	[kg]	0,38
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø80
RECESSED DEPTH (H)	[mm]	130



## LIGHT DISTRIBUTION

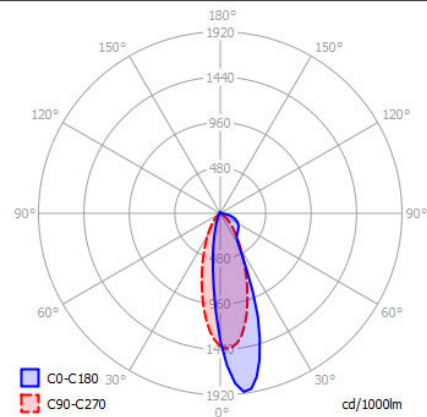

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES


### Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING