

# CLIPPO OPTIC DUO P3

## SPECIFICATIONS


MOUNTING		TRACK
POWER	[W]	2x10,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2x35-1240
LIGHT COLOUR	[K]	1800-3000
CRI		>90
BEAM ANGLE	[°]	35 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	118
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,75
GROSS WEIGHT	[kg]	1,80
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

35°

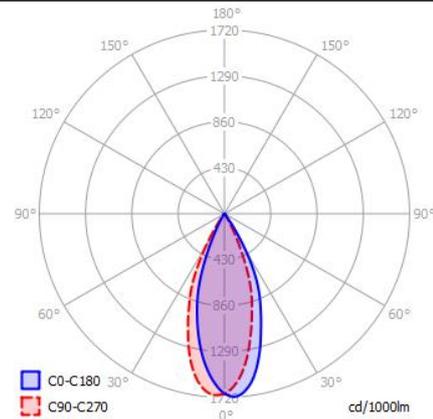

## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 50
ACCENT RING		GOLD



white/white



white/gold




black/black




black/gold



## TRACK MOUNTING



## FIXTURE DIMENSIONS

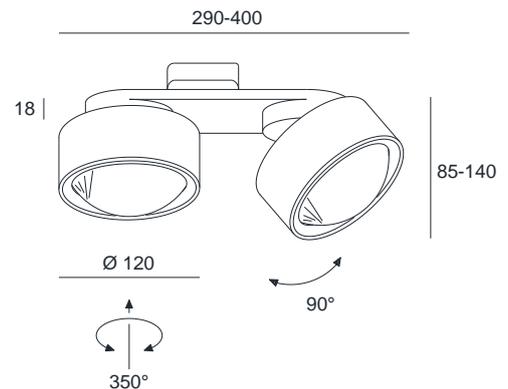

CRI > 90

dim to warm



IP20

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING