

SECRET DOWN


SPECIFICATIONS

| | | |
|--------------------|---------|----------------------|
| MOUNTING | | WALL |
| POWER | [W] | 3 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 260 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 86 |
| POWER SUPPLY | [V] [A] | 220-240V AC 50/60 Hz |
| LED-DRIVER | | INCLUDED |
| DIMMING | | NO |
| THROUGH-WIRING | | NO |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP54 |
| PROTECTION CLASS | | I |
| NET WEIGHT | [kg] | 0,92 |
| GROSS WEIGHT | [kg] | 0,95 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| COLOUR (HOUSING) | | GREY ~RAL9006 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

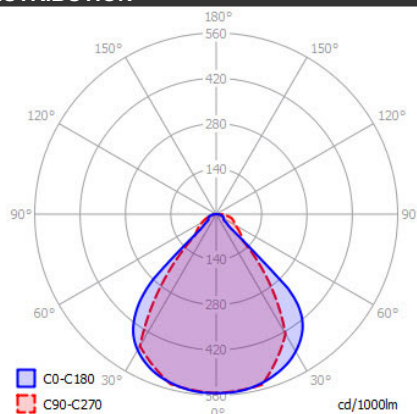


OPTIONS / OPTIONAL ACCESSORIES


Colours



MOUNTING DIMENSIONS

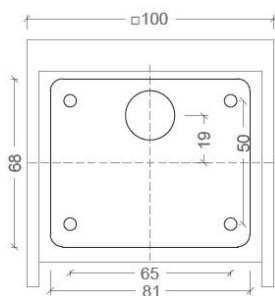

FIXTURE DIMENSIONS



DLS LIGHTING

www.dlslighting.com

***DLS**
LIGHTING