


MOON


SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	7,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	930 / 975
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	130
POWER SUPPLY		200mA CC
LED-DRIVER	[V] [A]	NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM/ opal glass
INGRESS PROTECTION		IP44
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,30
GROSS WEIGHT	[kg]	0,33
COLOUR (HOUSING)		WHITE ~RAL9003/ opal white
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	40

*Luminous flux values are nominal LED data at a operating temperature of 25° C

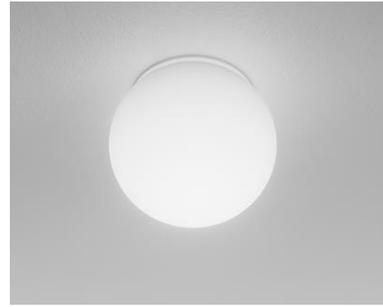


LIGHT DISTRIBUTION

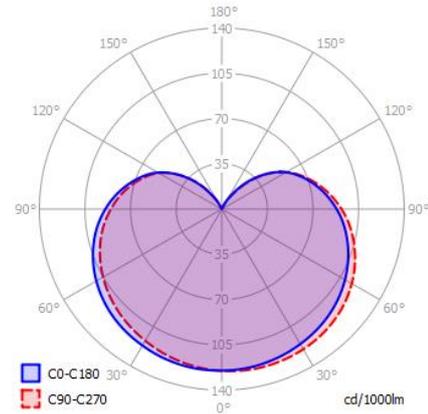


OPTIONS / OPTIONAL ACCESSORIES

Colours




white/opal white

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING