

PISA

SPECIFICATIONS

| | | |
|-------------------|--------|--------------|
| MOUNTING | | GROUND |
| POWER | [W] | 2,1 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 180 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 85 |


| | | |
|----------------|---------|--------------|
| POWER SUPPLY | [V] [A] | 24V dc |
| LED-DRIVER | | NOT INCLUDED |
| DIMMING | | SEE DRIVER |
| THROUGH-WIRING | | SEE DRIVER |

| | |
|--------------------|---------------------------------|
| MATERIAL | ALUMINUM / ACRYLIC GLASS |
| INGRESS PROTECTION | IP65 |
| PROTECTION CLASS | III |
| NET WEIGHT | [kg] 0,59 |
| GROSS WEIGHT | [kg] 0,62 |
| COLOUR (HOUSING) | BLACK ~RAL9005 |
| OUTLET CABLE | 2m H05RN-F 2x0,5mm ² |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

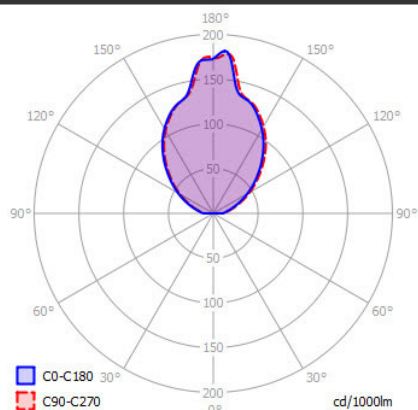

OPTIONS / OPTIONAL ACCESSORIES


| | | |
|--------------------|----|-------|
| MICRO JUNCTION BOX | II | BLACK |
| MICRO JUNCTION BOX | IV | BLACK |



MOUNTING DIMENSIONS

n/a

FIXTURE DIMENSIONS

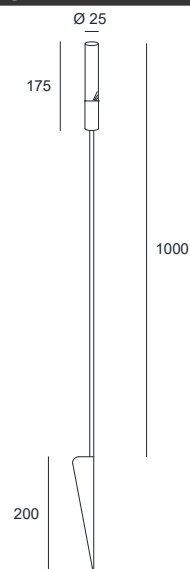

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING