


SPECIFICATIONS

| | | |
|-------------------------|--------|----------------------|
| MOUNTING | | CEILING |
| POWER | [W] | 7 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 730 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | 33 |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 104 |
| POWER SUPPLY | | 220-240V AC 50/60 Hz |
| LED-DRIVER | | INCLUDED |
| DIMMING | | ON/OFF or PHASE DIM |
| THROUGH-WIRING | | NO |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | I |
| NET WEIGHT | [kg] | 0,77 |
| GROSS WEIGHT | [kg] | 0,80 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |



LIGHT DISTRIBUTION

33°

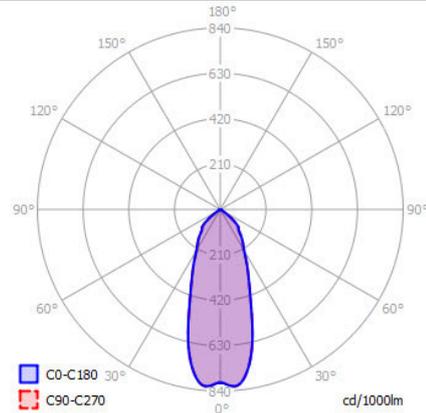

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

CEILING HOUSING FOR MULTIPLE PEDANTS LP5/ LP7/ LP8/STAR
 CABLE KIT 5 5000mm cable

Colours



MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

