


CLIPPO TRIO 3x9,5W LED DIM TO WARM

SPECIFICATIONS


MOUNTING		CEILING / WALL
POWER	[W]	3x9,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	3x45-915
LIGHT COLOUR	[K]	1910-3000
CRI		>90
BEAM ANGLE	[°]	33 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	96
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	2,26
GROSS WEIGHT	[kg]	2,48
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

*Luminous flux values are nominal LED data at a operating temperature of 25° C

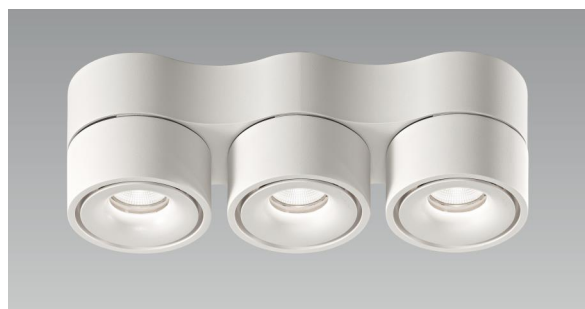

LIGHT DISTRIBUTION

33°

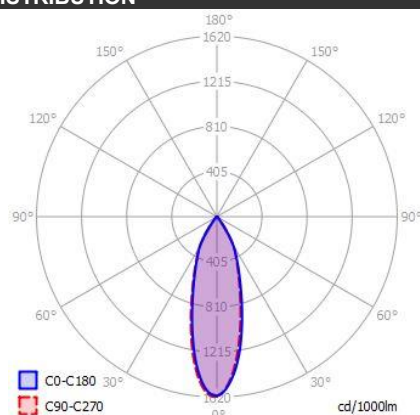

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 50
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD
DIMMING		DALI



Colours




white/white

white/gold


black/black

black/gold

MOUNTING DIMENSIONS

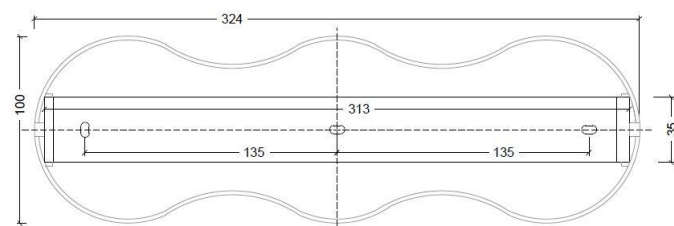

FIXTURE DIMENSIONS

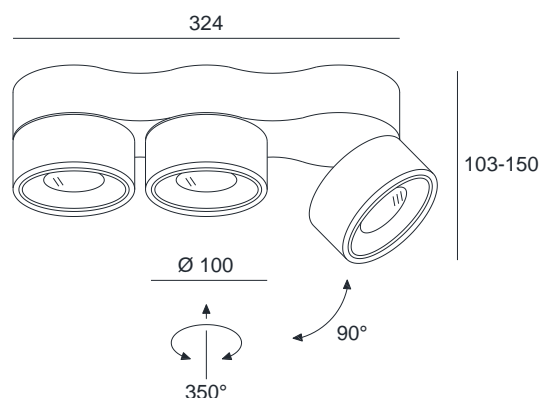

DLS LIGHTING

www.dlsighting.com


***DLS**
LIGHTING

CLIPPO TRIO 3x9,3W LED

SPECIFICATIONS


MOUNTING		CEILING / WALL
POWER	[W]	3x9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	3x1100 / 3x1150
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	32 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	123
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	2,26
GROSS WEIGHT	[kg]	2,48
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

*Luminous flux values are nominal LED data at a operating temperature of 25° C

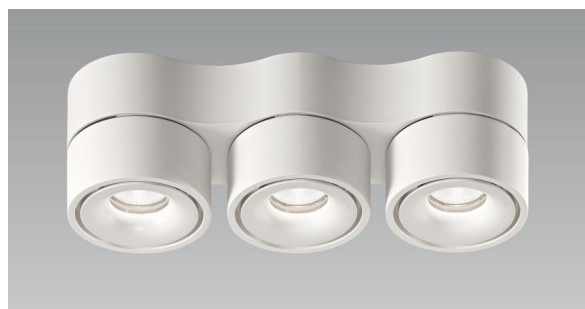

LIGHT DISTRIBUTION

33°

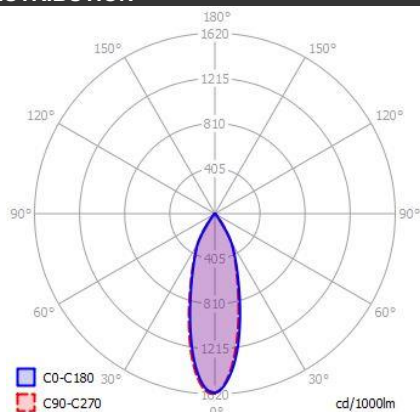

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	15 / 48
LENS	[°]	18
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD
DIMMING		DALI



Colours




white/white

white/gold


black/black

black/gold

MOUNTING DIMENSIONS

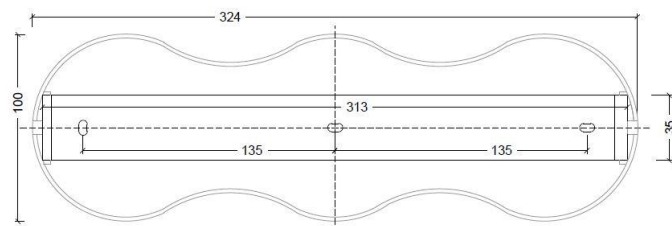

FIXTURE DIMENSIONS

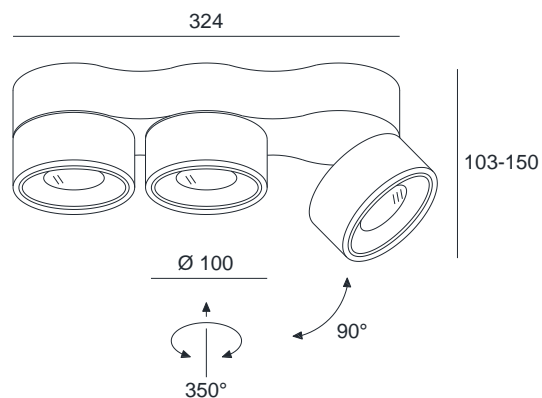

CRI>90



IP20

DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING