

DIVA Q


SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	15
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	940
LIGHT COLOUR	[K]	3000
CRI		>80
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	62
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,90
GROSS WEIGHT	[kg]	1,95
COLOUR (HOUSING)		WHITE ~RAL9003

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

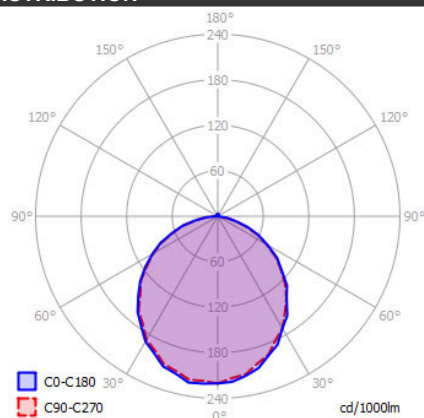


OPTIONS / OPTIONAL ACCESSORIES

Colours





white

MOUNTING DIMENSIONS

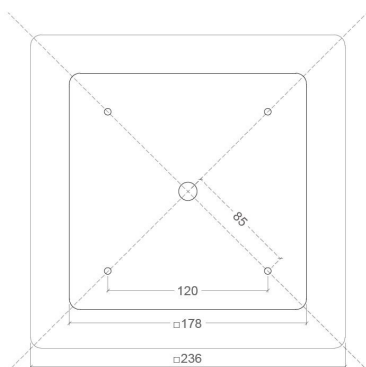

FIXTURE DIMENSIONS

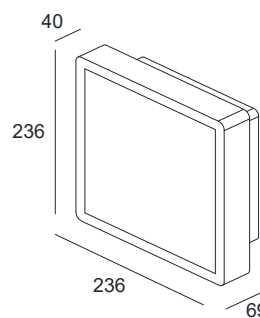

DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING