

# CLIPPO OPTIC DUO


## SPECIFICATIONS

<b>MOUNTING</b>		CEILING / WALL
POWER	[W]	2x10,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2x35-1240
LIGHT COLOUR	[K]	1800-3000
CRI		>90
BEAM ANGLE	[°]	35 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	118
<b>POWER SUPPLY</b>	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
<b>MATERIAL</b>		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,70
GROSS WEIGHT	[kg]	1,74
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



## LIGHT DISTRIBUTION

35°

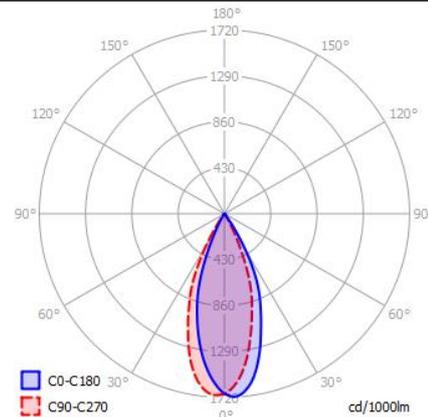

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 50
ACCENT RING		GOLD



white/white



white/gold




black/black




black/gold



## MOUNTING DIMENSIONS

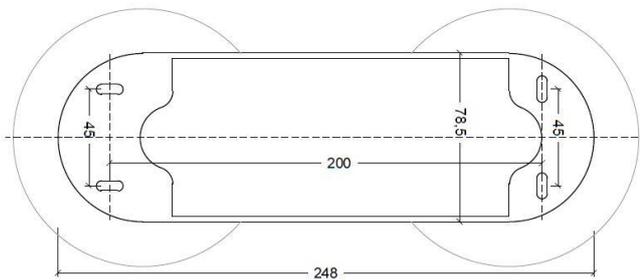

## FIXTURE DIMENSIONS

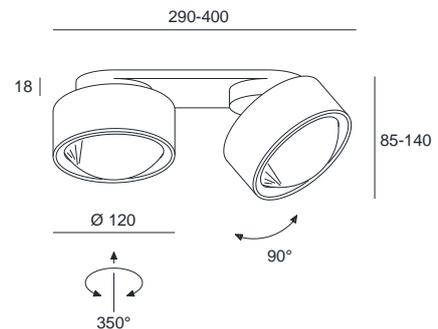

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING