

# SPAGO 60 EP

## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	230
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	40
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	115

POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,37
GROSS WEIGHT	[kg]	0,40
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		GOLD ~RAL8000
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	45

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION


40°

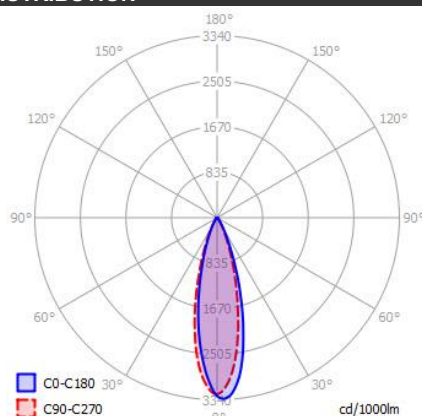


## OPTIONS / OPTIONAL ACCESSORIES

DIFFUSER	GLASS HEAD, SAND BLASTED
CABLE KIT 5	5000mm cable



## Colours

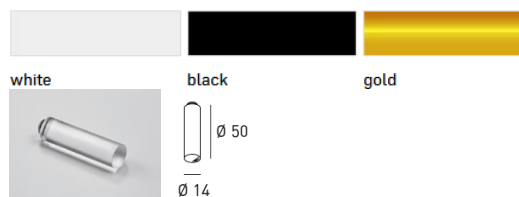

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS

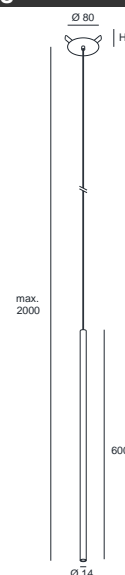

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING