

# KENT BAKERY

## SPECIFICATIONS


|                    |         |                      |
|--------------------|---------|----------------------|
| MOUNTING           |         | TRACK                |
| POWER              | [W]     | 32                   |
| LAMP               |         | built-in LED         |
| LUMINOUS FLUX*     | [lm]    | 2200                 |
| LIGHT COLOUR       | [K]     | 2500                 |
| CRI                |         | >80                  |
| BEAM ANGLE         | [°]     | 26 (default)         |
| AVERAGE LIFETIME   | [h]     | L80/B50.000          |
| LUMINOUS EFFICACY  | [lm/W]  | 68                   |
| POWER SUPPLY       | [V] [A] | 220-240V AC 50/60 Hz |
| LED-DRIVER         |         | INCLUDED             |
| DIMMING            |         | NO                   |
| THROUGH-WIRING     |         | -                    |
| MATERIAL           |         | ALUMINUM             |
| INGRESS PROTECTION |         | IP20                 |
| PROTECTION CLASS   |         | I                    |
| NET WEIGHT         | [kg]    | 1,06                 |
| GROSS WEIGHT       | [kg]    | 1,10                 |
| COLOUR (HOUSING)   |         | WHITE ~RAL9003       |
| COLOUR (HOUSING)   |         | BLACK ~RAL9005       |

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

26°

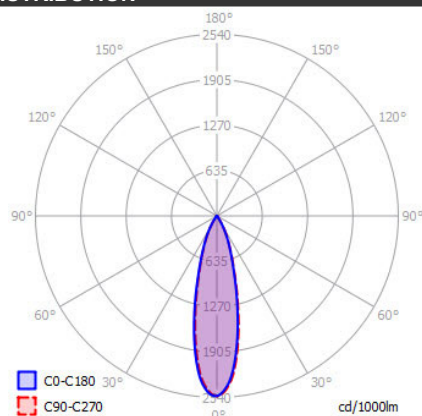

## OPTIONS / OPTIONAL ACCESSORIES

|                   |     |                     |
|-------------------|-----|---------------------|
| REFLECTOR         | [°] | 15 / 38             |
| ANTI GLARE SHADE  |     | BLACK               |
| SNOOT             |     | BLACK               |
| HONEY COMB LOUVER |     | BLACK               |
| FILTER LENS       |     | LINEAR DIFFUSION    |
| FILTER LENS       |     | PRISMATIC DIFFUSION |




## Colours




white

black

## TRACK MOUNTING

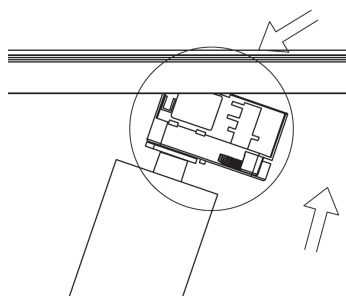

## FIXTURE DIMENSIONS



IP20

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING