

# LIGHT BOX 3

## SPECIFICATIONS


MOUNTING		CEILING
POWER	[W]	3xGU10 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,27
GROSS WEIGHT	[kg]	1,30
COLOUR (HOUSING)		WHITE ~ RAL9003
COLOUR (HOUSING)		BLACK ~ RAL9005
COLOUR (HOUSING)		GREY ~ RAL9006

\*Luminous flux values are nominal LED data at a operating temperature of 25° C




## LIGHT DISTRIBUTION (OSRAM LAMP)

36°

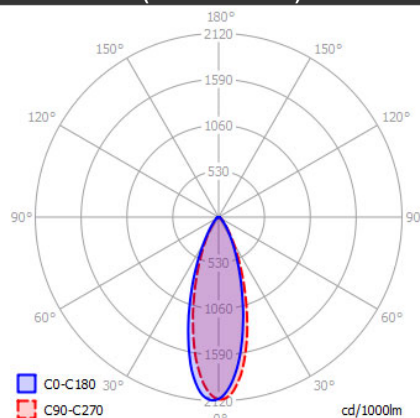


## OPTIONS / OPTIONAL ACCESSORIES


### Colours



## MOUNTING DIMENSIONS

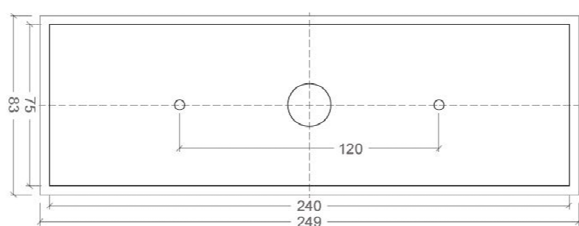

## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING