

CLIPPO OPTIC WALL


SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	2x6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2x15-635
LIGHT COLOUR	[K]	1800-3000
CRI		>90
BEAM ANGLE	[°]	80 / 80
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	105
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,15
GROSS WEIGHT	[kg]	1,20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION

80°/80°

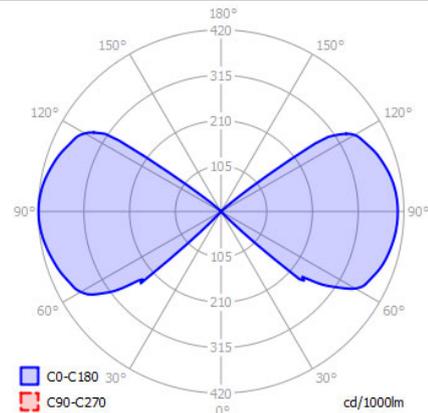


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES



ACCENT RING GOLD



MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

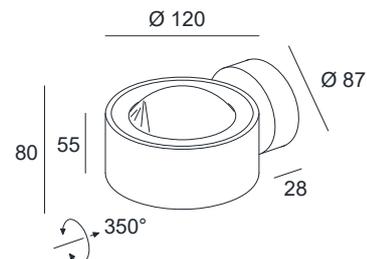

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING