

SCOTTY 9


SPECIFICATIONS

MOUNTING		INGROUND
POWER	[W]	9
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1125
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	30
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	125
POWER SUPPLY		220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES (JUNCTION BOX IV)
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP67
PROTECTION CLASS		I
IMPACT PROTECTION		IK10
NET WEIGHT	[kg]	1,60
GROSS WEIGHT	[kg]	1,65
COLOUR (HOUSING)		STAINLESS STEEL
CUT-OUT	[mm]	Ø165
RECESSED DEPTH (H)	[mm]	200
OUTLET CABLE		2,0m H05RN-F 3x1,0mm ²

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION 30°

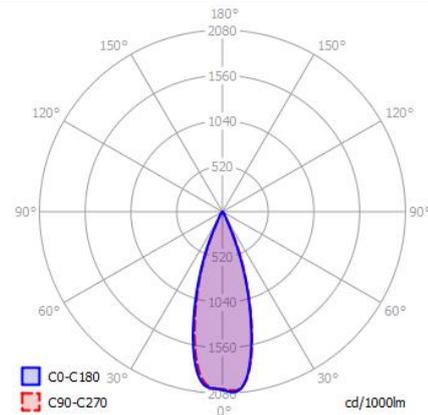

OPTIONS / OPTIONAL ACCESSORIES

MICRO JUNCTION BOX	II	BLACK
MICRO JUNCTION BOX	IV	BLACK
15° and 50° beam angle on request		




Colours




stainless steel

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS

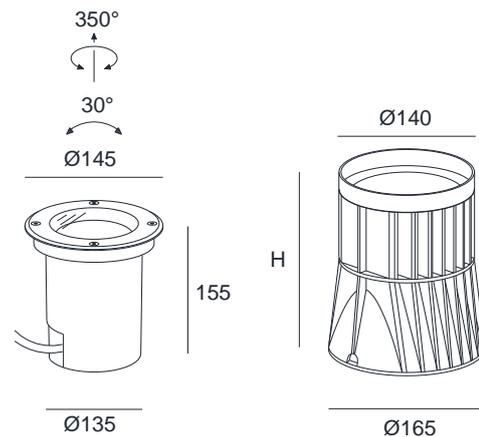

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING