


# NO FRAME 150 ROUND

## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	1xG53 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	12V AC
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0.91
GROSS WEIGHT	[kg]	0.95
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9004
CUT-OUT	[mm]	ø160
RECESSED DEPTH (H)	[mm]	120




## LIGHT DISTRIBUTION (OSRAM LAMP) 24°

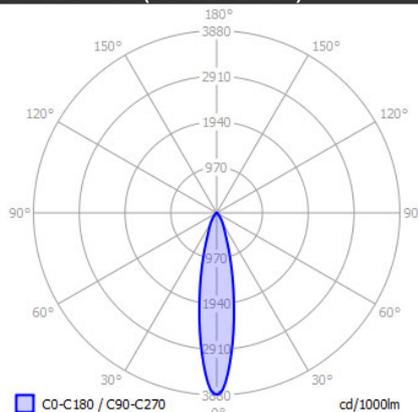

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

RECESSED FRAME KIT	WHITE
RECESSED FRAME KIT	BLACK
ANTI GLARE CONE 150	WHITE
ANTI GLARE CONE 150	BLACK




### Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dlslighting.com

**\*DLS**  
LIGHTING