

MICRO Q

SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	2,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	182
LIGHT COLOUR	[K]	2700
CRI		>80
BEAM ANGLE	[°]	8 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	79
POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,14
GROSS WEIGHT	[kg]	0,15
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	51x51
RECESSED DEPTH (H)	[mm]	85

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

8°

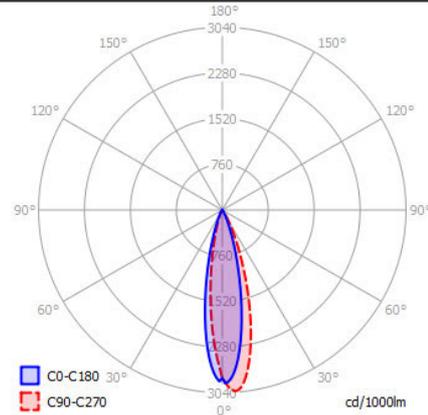


OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24
-----------	-----	----


Colours



CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING