

INFINITY S

SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	13
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1550 / 1610
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	38
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	113
POWER SUPPLY	[V] [A]	350mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,20
GROSS WEIGHT	[kg]	0,21
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø75
RECESSED DEPTH (H)	[mm]	60

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

38°

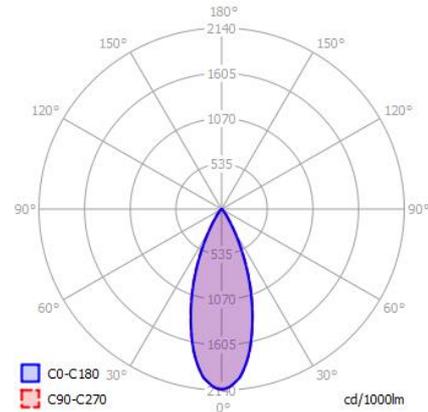


OPTIONS / OPTIONAL ACCESSORIES



Colours



CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING