


SMILE IP65

SPECIFICATIONS

MOUNTING		WALL RECESSED	
POWER	[W]	2	
LAMP		built-in LED	
LUMINOUS FLUX*	[lm]	190	
LIGHT COLOUR	[K]	3000	
CRI		>90	
BEAM ANGLE	[°]	-	
AVERAGE LIFETIME	[h]	L80/B50.000	
LUMINOUS EFFICACY	[lm/W]	95	
POWER SUPPLY	[V] [A]	500mA cc	
LED-DRIVER		NOT INCLUDED	
DIMMING		SEE DRIVER	
THROUGH-WIRING		SEE DRIVER	
MATERIAL		ALUMINUM	
INGRESS PROTECTION		IP65	
PROTECTION CLASS		III	
NET WEIGHT	[kg]	0,05	
GROSS WEIGHT	[kg]	0,05	
COLOUR (HOUSING)		BLACK ANODIZED	n/a
COLOUR (HOUSING)		ALU NATURE ANODIZED	

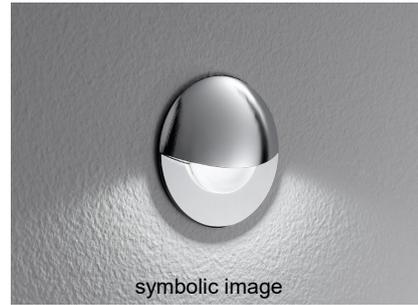

LIGHT DISTRIBUTION


n/a

CUT-OUT (FIXTURE)	[mm]	ø36
RECESSED DEPTH (H)	[mm]	34

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


- MOUNTING BOX
- CONCRETE MOUNTING SLEEVE
- MOUNTING RING FOR JUNCTION BOXES




Colours



CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

*DLS
LIGHTING