

ROYAL

SPECIFICATIONS

| | | |
|-------------------|--------|------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 6x2,4 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 820 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >80 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 56 |

| | | |
|----------------|---------|--------------|
| POWER SUPPLY | [V] [A] | 500mA CC |
| LED-DRIVER | | NOT INCLUDED |
| DIMMING | | SEE DRIVER |
| THROUGH-WIRING | | SEE DRIVER |

| | | |
|--------------------|------|--------------------------|
| MATERIAL | | ALUMINUM / ACRYLIC GLASS |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | III |
| NET WEIGHT | [kg] | 0,29 |
| GROSS WEIGHT | [kg] | 0,30 |


| | | |
|------------------|--|------------|
| COLOUR (HOUSING) | | OPAL WHITE |
|------------------|--|------------|

| | | |
|--------------------|------|-----|
| CUT-OUT | [mm] | Ø88 |
| RECESSED DEPTH (H) | [mm] | 75 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

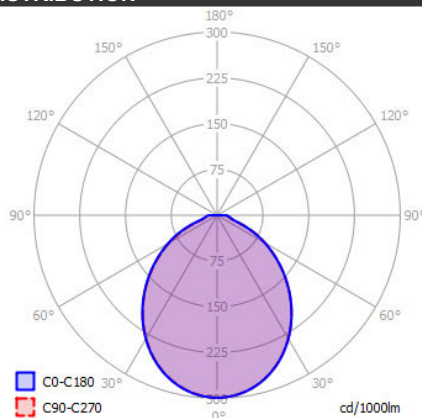


OPTIONS / OPTIONAL ACCESSORIES

Colours




opal white

MOUNTING DIMENSIONS

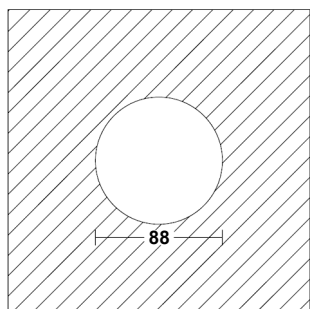

FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING