

# LUCY EP

## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	10
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1040 / 1080
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	38 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	104

POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER

MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,38
GROSS WEIGHT	[kg]	0,40
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005


CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	45

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

38°

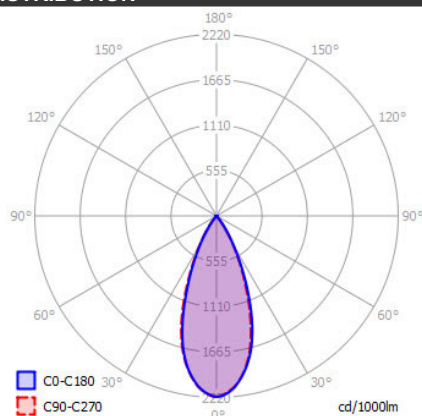


## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	18 / 60
-----------	-----	---------




## Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING