

# INFINITY M

## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	17
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2510 / 2550
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	38
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	115

POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,26
GROSS WEIGHT	[kg]	0,28
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø90
RECESSED DEPTH (H)	[mm]	70

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

38°

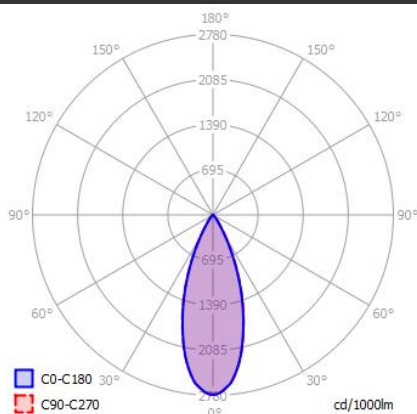


## OPTIONS / OPTIONAL ACCESSORIES



### Colours

white/black	white/silver	white/gold	white/white
black/black	black/silver	black/gold	black/white

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dlsighting.com

**\*DLS**  
LIGHTING