

# ALBA

## SPECIFICATIONS


MOUNTING		CEILING / WALL
POWER	[W]	11
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1200
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	109

POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO


MATERIAL	ALUMINUM / ACRYLIC GLASS
INGRESS PROTECTION	IP65
PROTECTION CLASS	I
IMPACT PROTECTION	IK04
NET WEIGHT	[kg] 1,62
GROSS WEIGHT	[kg] 1,70

COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (HOUSING)	BLACK ~RAL9005

\*Luminous flux values are nominal LED data at a operating temperature of 25° C




## LIGHT DISTRIBUTION

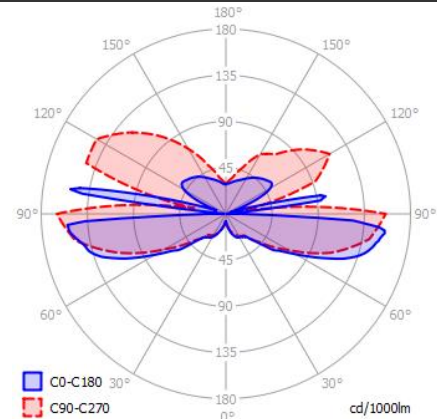

## OPTIONS / OPTIONAL ACCESSORIES


### Colours




white

black

## MOUNTING DIMENSIONS

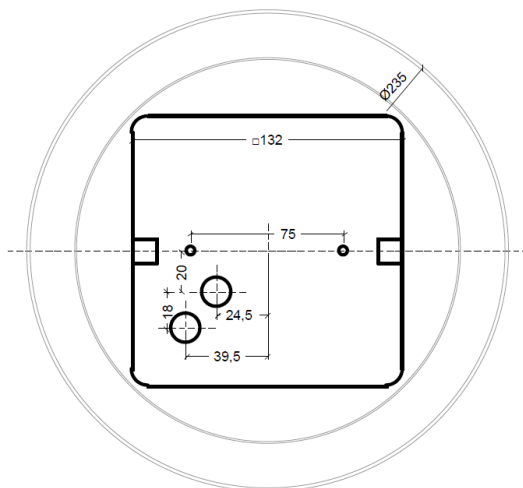

## FIXTURE DIMENSIONS



DLS LIGHTING

www.dlsighting.com

**\*DLS**  
LIGHTING