

IDOWN 13


SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	13
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1290
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	30
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	94
POWER SUPPLY		350mA CC
LED-DRIVER	[V] [A]	NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,33
GROSS WEIGHT	[kg]	0,35
COLOUR (HOUSING)		OPAL WHITE
CUT-OUT	[mm]	Ø85
RECESSED DEPTH (H)	[mm]	110



LIGHT DISTRIBUTION

30°

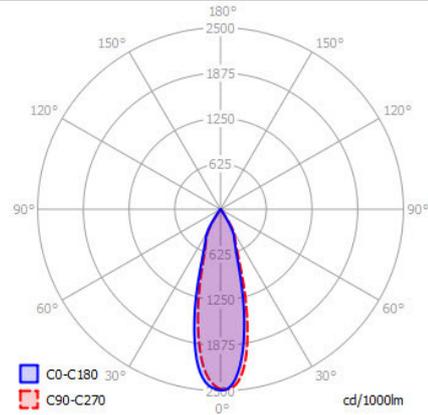


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


15° beam angle on request

Colours




white

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING