

CLIPPO S TRIMLESS DTW

SPECIFICATIONS


MOUNTING		CEILING
POWER	[W]	9,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	45-915
LIGHT COLOUR	[K]	1910-3000
CRI		>90
BEAM ANGLE	[°]	34 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	96
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,34
GROSS WEIGHT	[kg]	0,37
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	-
RECESSED DEPTH (H)	[mm]	-

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

34°

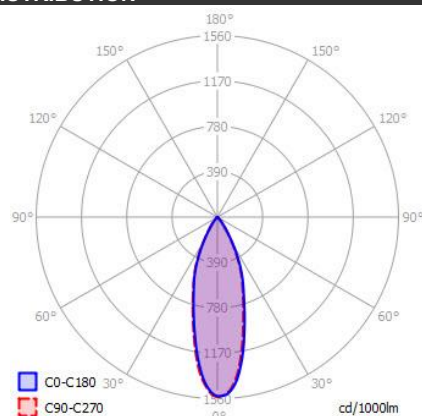

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 48
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



Colours




white/white

white/gold


black/black

black/gold

MOUNTING DIMENSIONS

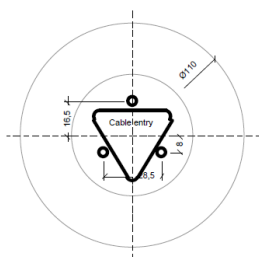

FIXTURE DIMENSIONS

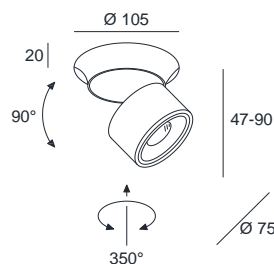

DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING

CLIPPO S TRIMLESS 2700K

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1100
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	34 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	118

POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,34
GROSS WEIGHT	[kg]	0,37
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	-
RECESSED DEPTH (H)	[mm]	-

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

34°

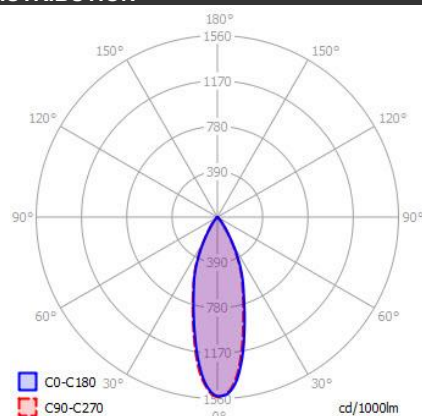

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 48
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



Colours




white/white

white/gold


black/black

black/gold

MOUNTING DIMENSIONS

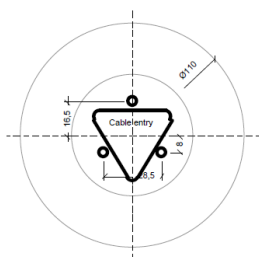

FIXTURE DIMENSIONS

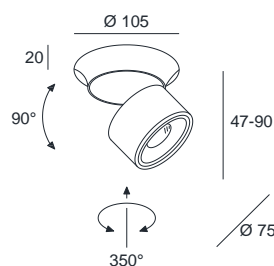

CRI>90

DIM



IP20

DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING