

# PHOENIX

## SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	13
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1208 / 1295
LIGHT COLOUR	[K]	2700K / 3000K
CRI		>90
BEAM ANGLE	[°]	125
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	92
POWER SUPPLY	[V] [A]	350mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM / ACRYLIC GLASS
INGRESS PROTECTION		IP44
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,29
GROSS WEIGHT	[kg]	0,30
COLOUR (HOUSING)		WHITE ~RAL9003 / OPAL WHITE
CUT-OUT	[mm]	Ø82
RECESSED DEPTH (H)	[mm]	45

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

125°

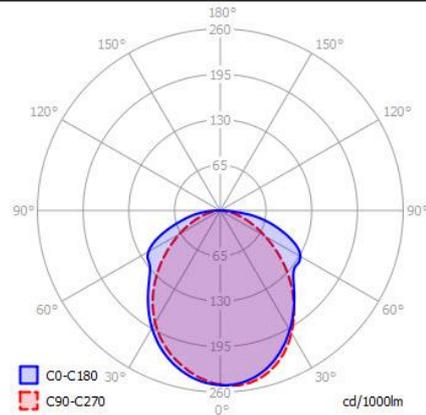


## OPTIONS / OPTIONAL ACCESSORIES

POWER	[W]	9W @ 250mA
LUMINOUS FLUX*	[lm]	875 / 940
LIGHT COLOUR	[K]	2700K / 3000K
POWER SUPPLY	[V] [A]	250mA CC



## Colours



## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING