

# SUPREME 60


## SPECIFICATIONS

|                    |         |                          |
|--------------------|---------|--------------------------|
| MOUNTING           |         | CEILING / WALL           |
| POWER              | [W]     | 10                       |
| LAMP               |         | built-in LED             |
| LUMINOUS FLUX*     | [lm]    | 1305                     |
| LIGHT COLOUR       | [K]     | 3000                     |
| CRI                |         | >80                      |
| BEAM ANGLE         | [°]     | -                        |
| AVERAGE LIFETIME   | [h]     | L80/B50.000              |
| LUMINOUS EFFICACY  | [lm/W]  | 130                      |
| POWER SUPPLY       | [V] [A] | 220-240V AC 50/60 Hz     |
| LED-DRIVER         |         | INCLUDED                 |
| DIMMING            |         | NO                       |
| THROUGH-WIRING     |         | NO                       |
| MATERIAL           |         | ACRYLIC GLASS            |
| INGRESS PROTECTION |         | IP44                     |
| PROTECTION CLASS   |         | II                       |
| NET WEIGHT         | [kg]    | 1,01                     |
| GROSS WEIGHT       | [kg]    | 1,05                     |
| COLOUR (HOUSING)   |         | POLISHED STAINLESS STEEL |

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

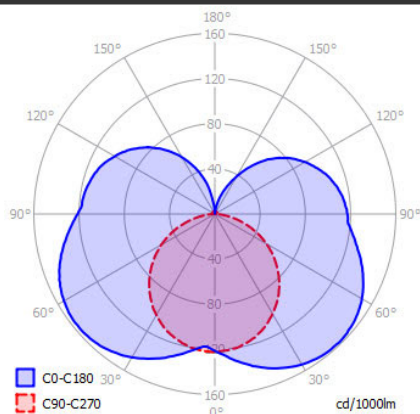


## OPTIONS / OPTIONAL ACCESSORIES

### Colours





stainless steel  
polished

## MOUNTING DIMENSIONS (DRILLING TEMPLATE)

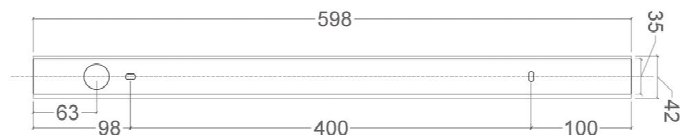

## FIXTURE DIMENSIONS

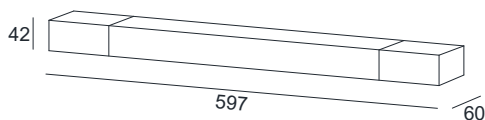

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# SUPREME 100


## SPECIFICATIONS

|                    |         |                          |
|--------------------|---------|--------------------------|
| MOUNTING           |         | CEILING / WALL           |
| POWER              | [W]     | 14                       |
| LAMP               |         | built-in LED             |
| LUMINOUS FLUX*     | [lm]    | 1660                     |
| LIGHT COLOUR       | [K]     | 3000                     |
| CRI                |         | >80                      |
| BEAM ANGLE         | [°]     | -                        |
| AVERAGE LIFETIME   | [h]     | L80/B50.000              |
| LUMINOUS EFFICACY  | [lm/W]  | 118                      |
| POWER SUPPLY       | [V] [A] | 220-240V AC 50/60 Hz     |
| LED-DRIVER         |         | INCLUDED                 |
| DIMMING            |         | NO                       |
| THROUGH-WIRING     |         | NO                       |
| MATERIAL           |         | ACRYLIC GLASS            |
| INGRESS PROTECTION |         | IP44                     |
| PROTECTION CLASS   |         | II                       |
| NET WEIGHT         | [kg]    | 1,45                     |
| GROSS WEIGHT       | [kg]    | 1,50                     |
| COLOUR (HOUSING)   |         | POLISHED STAINLESS STEEL |

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

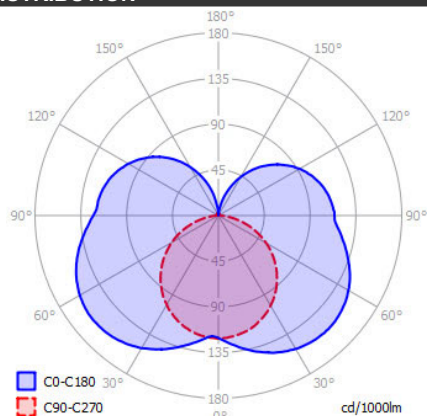


## OPTIONS / OPTIONAL ACCESSORIES

### Colours





stainless steel  
polished

## MOUNTING DIMENSIONS (DRILLING TEMPLATE)

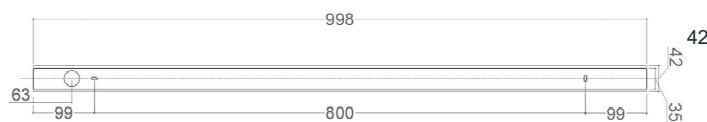

## FIXTURE DIMENSIONS

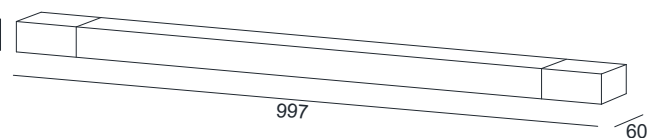

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# SUPREME 130


## SPECIFICATIONS

|                    |         |                          |
|--------------------|---------|--------------------------|
| MOUNTING           |         | CEILING / WALL           |
| POWER              | [W]     | 18                       |
| LAMP               |         | built-in LED             |
| LUMINOUS FLUX*     | [lm]    | 2135                     |
| LIGHT COLOUR       | [K]     | 3000                     |
| CRI                |         | >80                      |
| BEAM ANGLE         | [°]     | -                        |
| AVERAGE LIFETIME   | [h]     | L80/B50.000              |
| LUMINOUS EFFICACY  | [lm/W]  | 118                      |
| POWER SUPPLY       | [V] [A] | 220-240V AC 50/60 Hz     |
| LED-DRIVER         |         | INCLUDED                 |
| DIMMING            |         | NO                       |
| THROUGH-WIRING     |         | NO                       |
| MATERIAL           |         | ACRYLIC GLASS            |
| INGRESS PROTECTION |         | IP44                     |
| PROTECTION CLASS   |         | II                       |
| NET WEIGHT         | [kg]    | 1,74                     |
| GROSS WEIGHT       | [kg]    | 1,80                     |
| COLOUR (HOUSING)   |         | POLISHED STAINLESS STEEL |

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

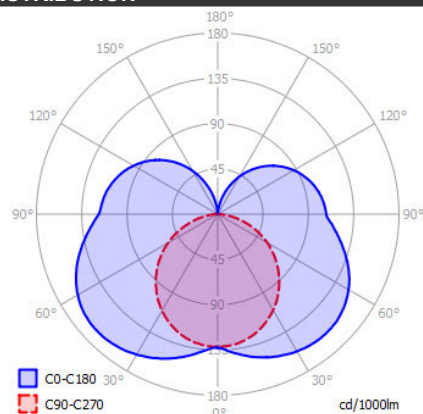


## OPTIONS / OPTIONAL ACCESSORIES

### Colours





stainless steel  
polished

## MOUNTING DIMENSIONS (DRILLING TEMPLATE)

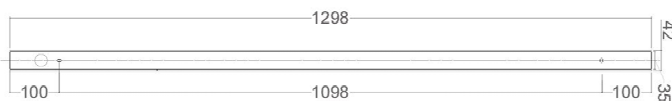

## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING