

# MIRA OPTIC 12,6W LED DIM TO WARM


## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	12,6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	40 - 1360
LIGHT COLOUR	[K]	1910 - 3000
CRI		>90
BEAM ANGLE	[°]	
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	93
POWER SUPPLY	[V] [A]	350mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,55
GROSS WEIGHT	[kg]	0,57
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø94
RECESSED DEPTH (H)	[mm]	110

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

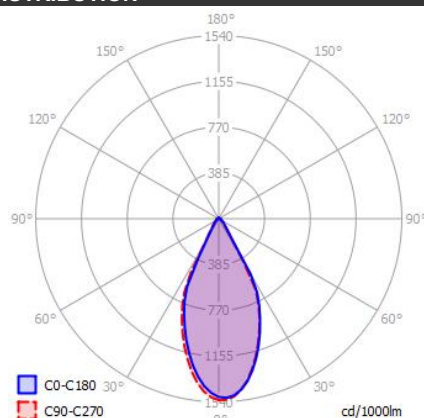


## OPTIONS / OPTIONAL ACCESSORIES



### Colours



## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS

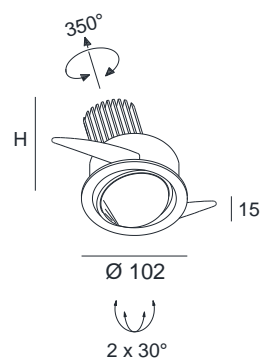

DLS LIGHTING

www.dlsighting.com

**\*DLS**  
LIGHTING

# MIRA OPTIC 14W LED


## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	14
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1550 / 1610
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	99
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,58
GROSS WEIGHT	[kg]	0,60
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø94
RECESSED DEPTH (H)	[mm]	130

\*Luminous flux values are nominal LED data at a operating temperature of 25° C




## LIGHT DISTRIBUTION

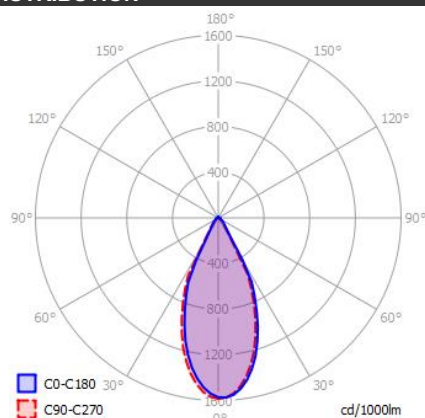

## OPTIONS / OPTIONAL ACCESSORIES


### Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS

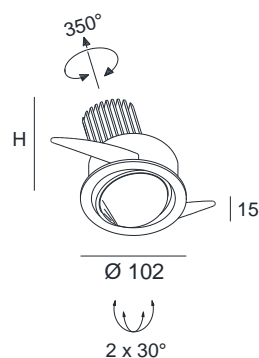

DLS LIGHTING

www.dlsighting.com

**\*DLS**  
LIGHTING

# MIRA OPTIC 9,3W LED


## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1100 / 1150
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	120
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,54
GROSS WEIGHT	[kg]	0,56
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø94
RECESSED DEPTH (H)	[mm]	105

\*Luminous flux values are nominal LED data at a operating temperature of 25° C




## LIGHT DISTRIBUTION

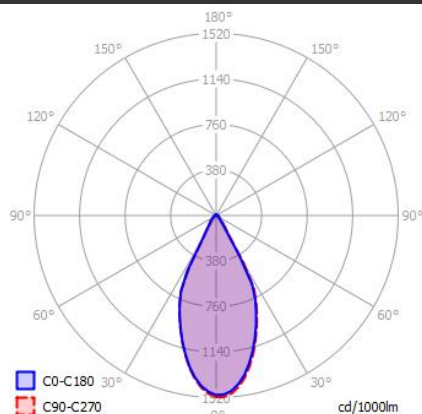

## OPTIONS / OPTIONAL ACCESSORIES


### Colours




white

black

## CUT OUT DIMENSIONS

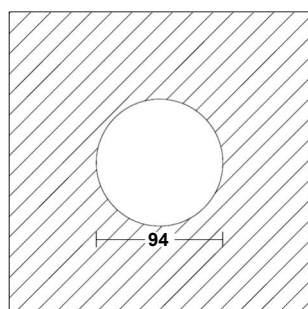

## FIXTURE DIMENSIONS

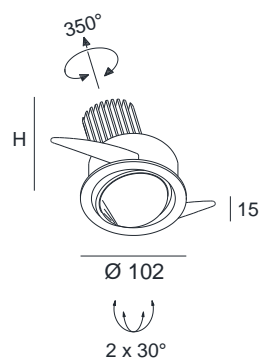

DLS LIGHTING

www.dlsighting.com

**\*DLS**  
LIGHTING