


# ORBIT SILENT R (SYM/ASYM)

## SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	7,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	660
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	88
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,82
GROSS WEIGHT	[kg]	1,86
COLOUR (HOUSING)		BLACK ~RAL9005

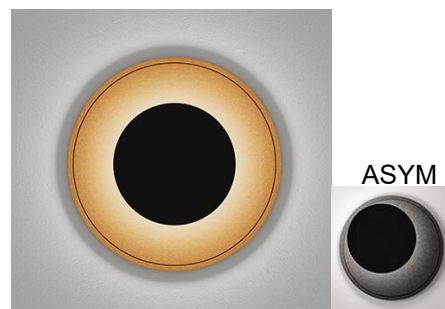

## LIGHT DISTRIBUTION

n/a

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

ARCHISONIC® acoustic material ø380mm /ø450mm

## Colours



black



542 - charcoal



108 - ground



810 - midnight



439 - moos




410 - winter sky




139 - honeycomb

## MOUNTING DIMENSIONS

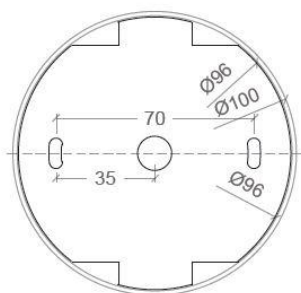

## FIXTURE DIMENSIONS

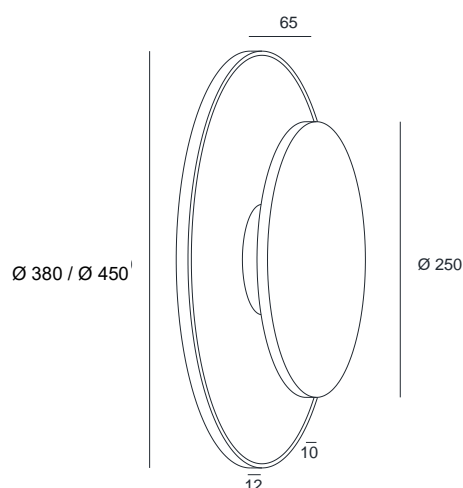

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING