

SCOTTY 6

SPECIFICATIONS


MOUNTING		INGROUND
POWER	[W]	8
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	800
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	20
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	100
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		YES (JUNCTION BOX IV)
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP67
PROTECTION CLASS		I
IMPACT PROTECTION		IK10
NET WEIGHT	[kg]	1,30
GROSS WEIGHT	[kg]	1,35
COLOUR (HOUSING)		STAINLESS STEEL
CUT-OUT	[mm]	Ø126
RECESSED DEPTH (H)	[mm]	173
OUTLET CABLE		1,0m H05RN-F 3x0,75mm²

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

20°

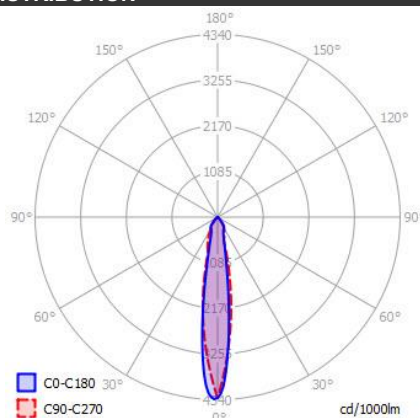

OPTIONS / OPTIONAL ACCESSORIES

MICRO JUNCTION BOX	II	BLACK
MICRO JUNCTION BOX	IV	BLACK
30° and 40° beam angle on request		




Colours




stainless steel

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS

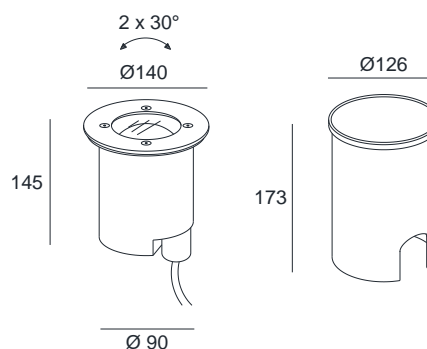

DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING