

TWO LIGHT

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	9,3 / 1,2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	880
LIGHT COLOUR	[K]	3000 / indirect 3000 or amber
CRI		>90
BEAM ANGLE	[°]	32
AVERAGE LIFETIME	[h]	50.000
LUMINOUS EFFICACY	[lm/W]	94

POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,38
GROSS WEIGHT	[kg]	0,40
COLOUR (HOUSING)		WHITE ~RAL9003
CUT-OUT	[mm]	Ø83
RECESSED DEPTH (H)	[mm]	100

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

32°

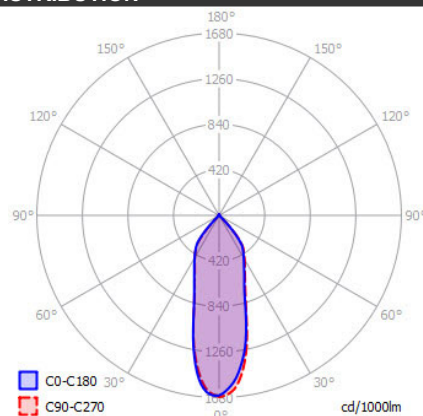

OPTIONS / OPTIONAL ACCESSORIES


Colours




white / lighting effect
amber

white / lighting effect
white

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING