

DOWNTOWN


SPECIFICATIONS

MOUNTING		GROUND
POWER	[W]	6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	650
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	100
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	108
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP65
PROTECTION CLASS		I
IMPACT PROTECTION		IK08
NET WEIGHT	[kg]	2,96
GROSS WEIGHT	[kg]	3,15
COLOUR (HOUSING)		BLACK ~RAL9004

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

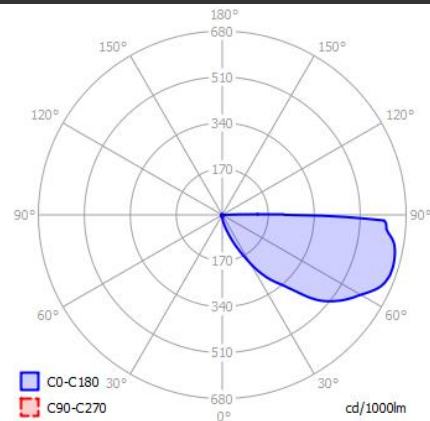


OPTIONS / OPTIONAL ACCESSORIES

Colours




black

MOUNTING DIMENSIONS

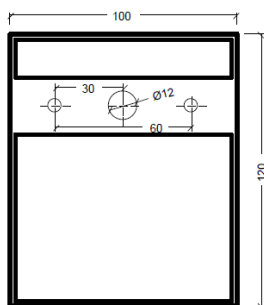

FIXTURE DIMENSIONS

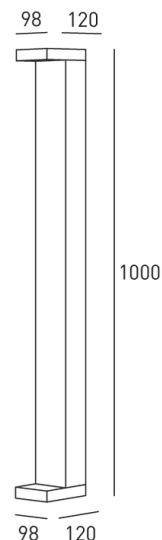

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

DOWNTOWN ENERGY


SPECIFICATIONS

MOUNTING		GROUND
POWER	[W]	6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	650
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	100
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	108
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP65
PROTECTION CLASS		I
IMPACT PROTECTION		IK08
NET WEIGHT	[kg]	2,96
GROSS WEIGHT	[kg]	3,15
COLOUR (HOUSING)		BLACK -RAL9004

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

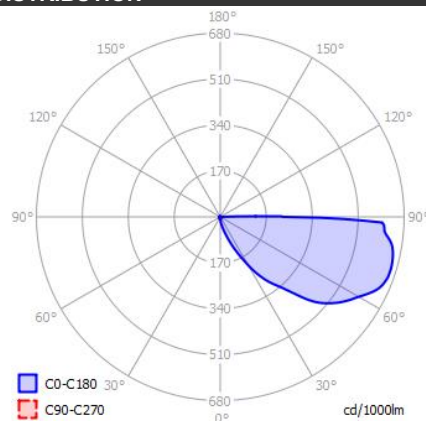

OPTIONS / OPTIONAL ACCESSORIES


SCHUKO SOCKET max.16A/230V

Colours




black

MOUNTING DIMENSIONS

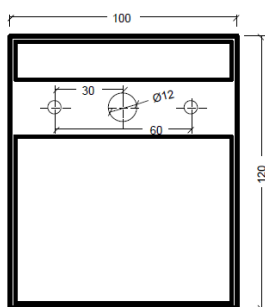

FIXTURE DIMENSIONS

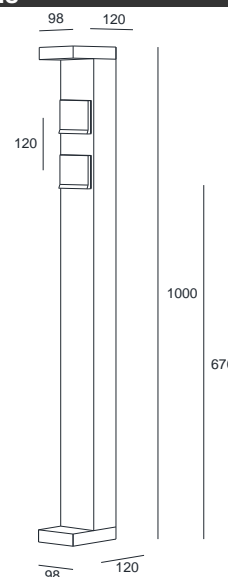

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING