

KENT MEAT

SPECIFICATIONS


MOUNTING		TRACK
POWER	[W]	32
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2000
LIGHT COLOUR	[K]	1750
CRI		>80
BEAM ANGLE	[°]	26 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	62
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,06
GROSS WEIGHT	[kg]	1,10
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

26°

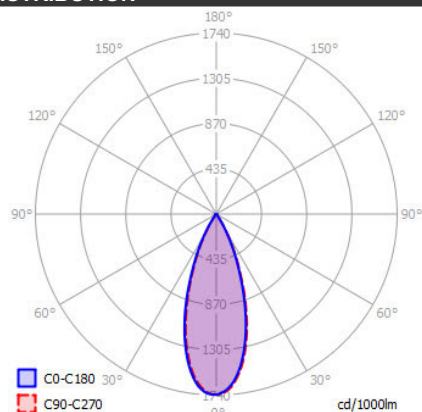

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	15 / 38
ANTI GLARE SHADE		BLACK
SNOOT		BLACK
HONEY COMB LOUVER		BLACK
FILTER LENS		LINEAR DIFFUSION
FILTER LENS		PRISMATIC DIFFUSION




Colours




white

black

TRACK MOUNTING



FIXTURE DIMENSIONS



IP20

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING