

# FRAME 150 DUO

## SPECIFICATIONS


|                    |         |                  |
|--------------------|---------|------------------|
| MOUNTING           |         | CEILING RECESSED |
| POWER              | [W]     | 2xG53 LED        |
| LAMP               |         | NOT INCLUDED     |
| LUMINOUS FLUX*     | [lm]    | -                |
| LIGHT COLOUR       | [K]     | -                |
| CRI                |         | -                |
| BEAM ANGLE         | [°]     | -                |
| AVERAGE LIFETIME   | [h]     | -                |
| LUMINOUS EFFICACY  | [lm/W]  | -                |
| POWER SUPPLY       | [V] [A] | 12V AC           |
| LED-DRIVER         |         | -                |
| DIMMING            |         | SEE LAMP         |
| THROUGH-WIRING     |         | NO               |
| MATERIAL           |         | ALUMINUM         |
| INGRESS PROTECTION |         | IP20             |
| PROTECTION CLASS   |         | III              |
| NET WEIGHT         | [kg]    | 1,86             |
| GROSS WEIGHT       | [kg]    | 1,90             |
| COLOUR (HOUSING)   |         | WHITE ~RAL9003   |
| COLOUR (HOUSING)   |         | BLACK ~RAL9004   |
| CUT-OUT            | [mm]    | 304x160          |
| RECESSED DEPTH (H) | [mm]    | 105              |

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION (OSRAM LAMP)

24°

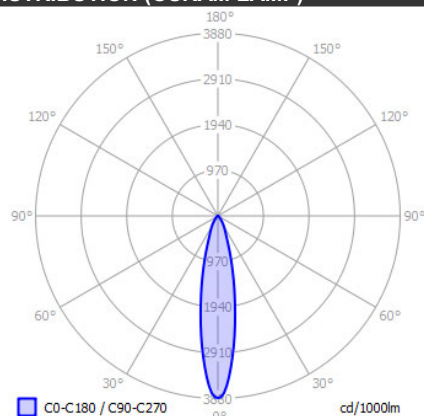


## OPTIONS / OPTIONAL ACCESSORIES

|                     |       |
|---------------------|-------|
| ANTI GLARE CONE 150 | WHITE |
| ANTI GLARE CONE 150 | BLACK |




## Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS

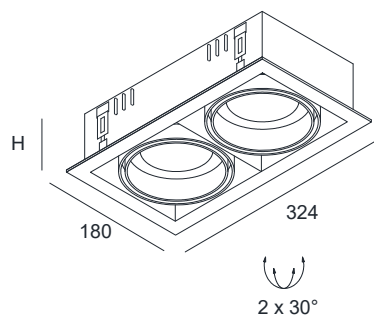

DLS LIGHTING

www.dlsighting.com

**\*DLS**  
LIGHTING