

ZOOM XL P3

SPECIFICATIONS

| | | | |
|--------------------|---------|----------------------|-----|
| MOUNTING | | TRACK | |
| POWER | [W] | 10 | |
| LAMP | | built-in LED | |
| LUMINOUS FLUX* | [lm] | 550 | |
| LIGHT COLOUR | [K] | 3000 | |
| CRI | | >95 | |
| BEAM ANGLE | [°] | 15-60 | |
| AVERAGE LIFETIME | [h] | L80/B50.000 | |
| LUMINOUS EFFICACY | [lm/W] | 134 | |
| POWER SUPPLY | [V] [A] | 220-240V AC 50/60 Hz | |
| LED-DRIVER | | INCLUDED | |
| DIMMING | | NO | |
| THROUGH-WIRING | | - | |
| MATERIAL | | BRASS | |
| INGRESS PROTECTION | | IP20 | |
| PROTECTION CLASS | | I | |
| NET WEIGHT | [kg] | 0,45 | |
| GROSS WEIGHT | [kg] | 0,46 | |
| COLOUR (HOUSING) | | WHITE ~RAL9003 | n/a |
| COLOUR (HOUSING) | | BLACK ~RAL9005 | |



LIGHT DISTRIBUTION


n/a

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

2700K and 4000K LED on request


Colours




white

black

TRACK MOUNTING



FIXTURE DIMENSIONS

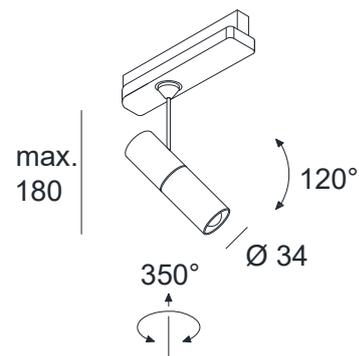

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING