


# RIGA Q 12,6W LED DIM TO WARM


## SPECIFICATIONS

<b>MOUNTING</b>		<b>CEILING RECESSED</b>
POWER	[W]	12,6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	40 - 1360
LIGHT COLOUR	[K]	1910 - 3000
CRI		>90
BEAM ANGLE	[°]	38 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	93
<b>POWER SUPPLY</b>		350mA CC
LED-DRIVER	[V] [A]	NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
<b>MATERIAL</b>		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,19
GROSS WEIGHT	[kg]	0,20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	85

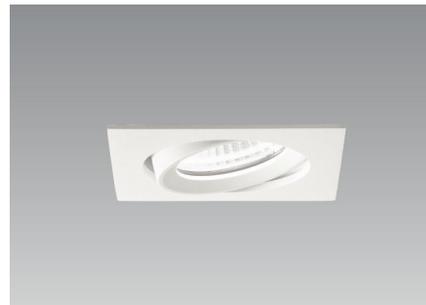

## LIGHT DISTRIBUTION

38°

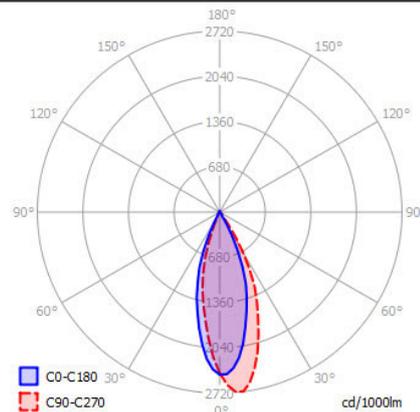


\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	15 / 25 / 60
SNOOT		BLACK
SNOOT		WHITE




## Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



CRI > 90



IP20

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# RIGA Q 9,3W LED

## SPECIFICATIONS


<b>MOUNTING</b>		<b>CEILING RECESSED</b>
POWER	[W]	9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1100 / 1150
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	38 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	120
<b>POWER SUPPLY</b>		<b>500mA CC</b>
LED-DRIVER	[V] [A]	<b>NOT INCLUDED</b>
DIMMING		<b>SEE DRIVER</b>
THROUGH-WIRING		<b>SEE DRIVER</b>
<b>MATERIAL</b>		<b>ALUMINUM</b>
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,19
GROSS WEIGHT	[kg]	0,20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	80

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

38°

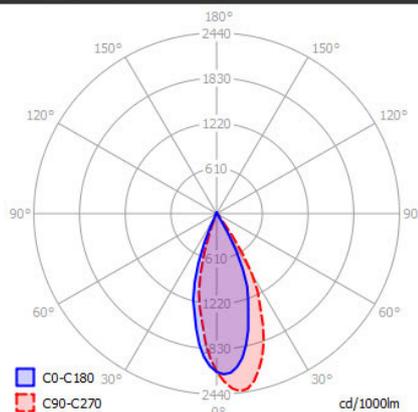


## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	15 / 25 / 60
LENS	[°]	11
SNOOT		BLACK
SNOOT		WHITE




### Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# RIGA Q GU10


## SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	1xGU10 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		II
NET WEIGHT	[kg]	0,17
GROSS WEIGHT	[kg]	0,18
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	110



## LIGHT DISTRIBUTION (OSRAM LAMP)

36°

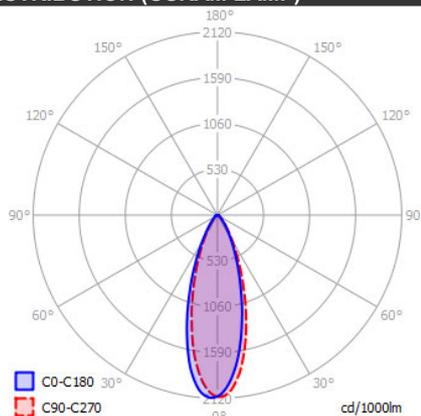

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES


## Colours




white

black

## CUT OUT DIMENSIONS



## FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING