

CENTRO

SPECIFICATIONS


| | | |
|-------------------------|---------|-------------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 13 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 1295 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | 75 |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 99 |
| POWER SUPPLY | | 350mA CC |
| LED-DRIVER | [V] [A] | NOT INCLUDED |
| DIMMING | | SEE DRIVER |
| THROUGH-WIRING | | SEE DRIVER |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | III |
| NET WEIGHT | [kg] | 0,38 |
| GROSS WEIGHT | [kg] | 0,40 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| CUT-OUT | [mm] | Ø102 |
| RECESSED DEPTH (H) | [mm] | 85 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

75°

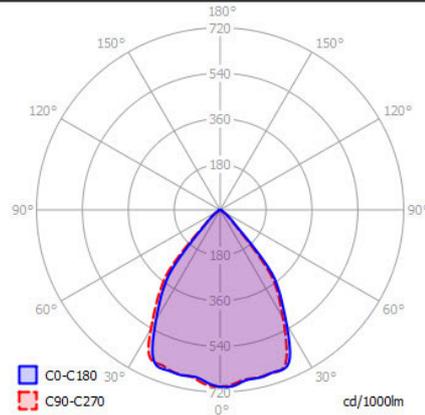

OPTIONS / OPTIONAL ACCESSORIES


Colours




white

black

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING