

STANDING CAPRI

SPECIFICATIONS


MOUNTING		FLOOR / TABLE
POWER	[W]	4
LAMP		built-in AC LED
LUMINOUS FLUX*	[lm]	305
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	40
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	76
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		-
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,92
GROSS WEIGHT	[kg]	0,95
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CABLE + SCHUKO PLUG		1,4m H05VV-F 3x0,75mm ²

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

40°

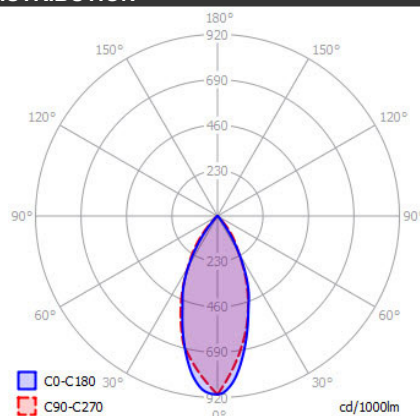

OPTIONS / OPTIONAL ACCESSORIES

Colours




white

black

MOUNTING DIMENSIONS

n/a

FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING