

CPX 170

SPECIFICATIONS


MOUNTING		CEILING RECESSED
POWER	[W]	33
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	4200
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	30
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	127
POWER SUPPLY	[V] [A]	900mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	1,01
GROSS WEIGHT	[kg]	1,05
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø150
RECESSED DEPTH (H)	[mm]	145

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

30°

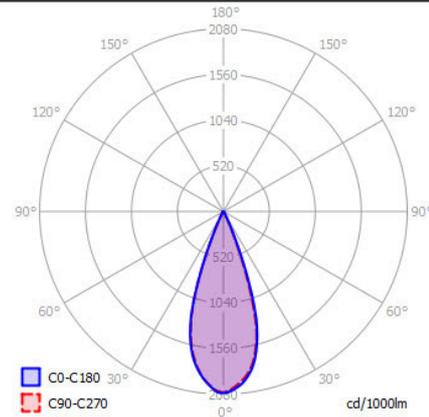

OPTIONS / OPTIONAL ACCESSORIES

ANTI GLARE RING	BLACK
ANTI GLARE RING	CHROME
2700K LED on request	

Colours




white/black

white/chrome


black/black

black/chrome

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS

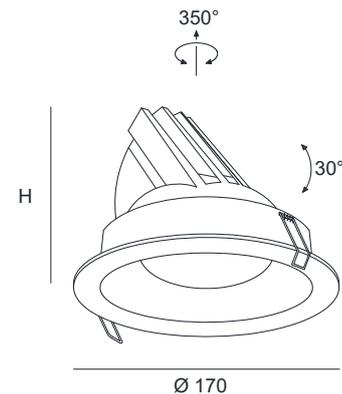

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING