

PHOENIX ON


SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	13
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1208 / 1295
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	125
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	92
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM / ACRYLIC GLASS
INGRESS PROTECTION		IP54
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,44
GROSS WEIGHT	[kg]	0,48
COLOUR (HOUSING)		WHITE ~RAL9003 / OPAL WHITE
COLOUR (HOUSING)		BLACK ~RAL9005 / OPAL WHITE



LIGHT DISTRIBUTION

125°

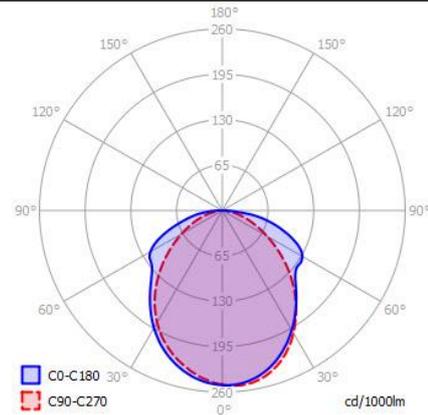

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


Colours




white

black

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

*DLS
LIGHTING