

LUCKY STAR


SPECIFICATIONS

MOUNTING		WALL RECESSED
POWER	[W]	4
LAMP		built-in AC LED
LUMINOUS FLUX*	[lm]	360
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	90
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,14
GROSS WEIGHT	[kg]	0,15
COLOUR (HOUSING)		WHITE ~RAL9003
CUT-OUT	[mm]	Ø60
RECESSED DEPTH (H)	[mm]	50

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

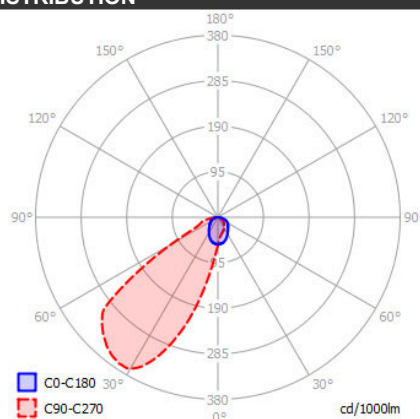


OPTIONS / OPTIONAL ACCESSORIES

MOUNTING BOX ON REQUEST




Colours




white

CUT OUT DIMENSIONS

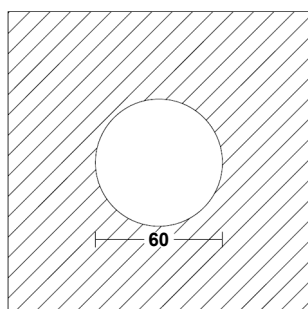

FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING