

ALASKA

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	10
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	950
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	32
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	95

POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,24
GROSS WEIGHT	[kg]	0,25
COLOUR (HOUSING)		WHITE ~RAL9003
CUT-OUT	[mm]	Ø68
RECESSED DEPTH (H)	[mm]	70

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

32°

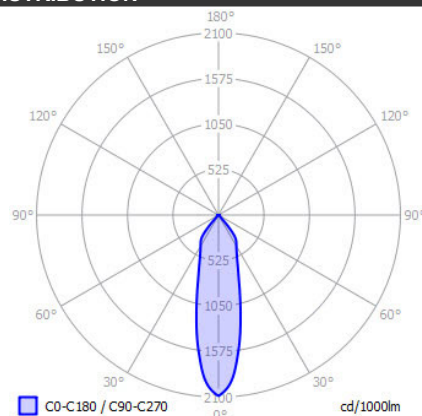


OPTIONS / OPTIONAL ACCESSORIES

Colours




white

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING