


CLEO

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	7
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	655
LIGHT COLOUR	[K]	2700
CRI		>80
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	93
POWER SUPPLY		220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,95
GROSS WEIGHT	[kg]	1,00
COLOUR (HOUSING)		BRASS
COLOUR (HOUSING)		BLACK -RAL9005



LIGHT DISTRIBUTION

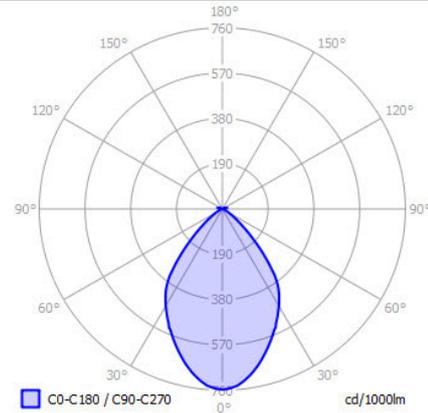

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

CEILING HOUSING FOR MULTIPLE PEDANTS LP5/ LP7/ LP8/STAR
CABLE KIT 5 5000mm cable


Colours




black

brass

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

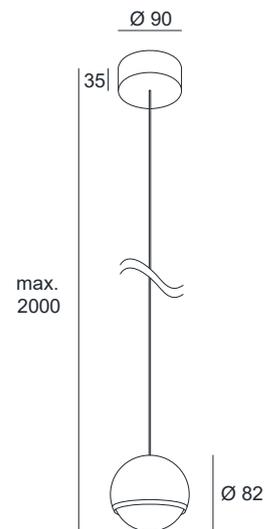

DLS LIGHTING

www.dslighting.com