


MIRA ZOOM

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	190
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	15-60 focusable
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	95
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,40
GROSS WEIGHT	[kg]	0,42
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø80
RECESSED DEPTH (H)	[mm]	60

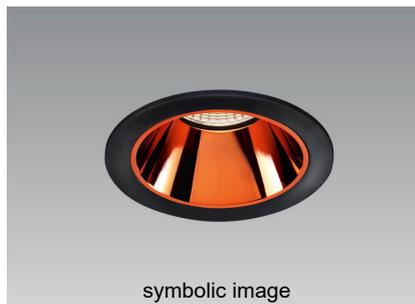

symbolic image

LIGHT DISTRIBUTION

n/a


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


ACCENT RING	CHROME (default)
ACCENT RING	BLACK
ACCENT RING	WHITE (new)
ACCENT RING	GOLD (new)
ACCENT RING	COPPER
ACCENT RING	MATT CHROME
LIGHT COLOUR 4000K	ON REQUEST



CUT OUT DIMENSIONS

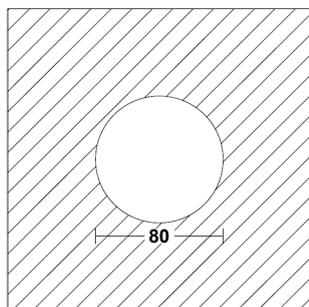

FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING