


STRATO 230

SPECIFICATIONS

| | | |
|--------------------|---------|----------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 21 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 2160 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 102 |
| POWER SUPPLY | [V] [A] | 220-240V AC 50/60 Hz |
| LED-DRIVER | | INCLUDED |
| DIMMING | | NO |
| THROUGH-WIRING | | NO |
| MATERIAL | | ALUMINIUM |
| INGRESS PROTECTION | | IP44 |
| PROTECTION CLASS | | III |
| NET WEIGHT | [kg] | 0,86 |
| GROSS WEIGHT | [kg] | 0,90 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| CUT-OUT | [mm] | Ø215 |
| RECESSED DEPTH (H) | [mm] | 95 |




LIGHT DISTRIBUTION

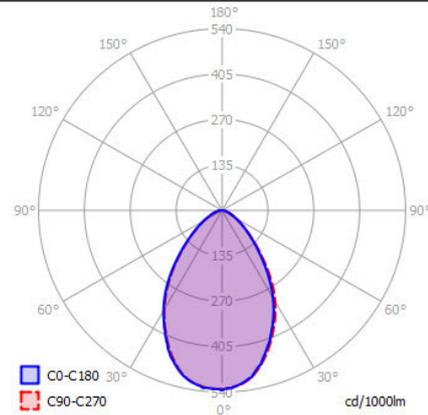

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

Colours




white

CUT OUT DIMENSIONS

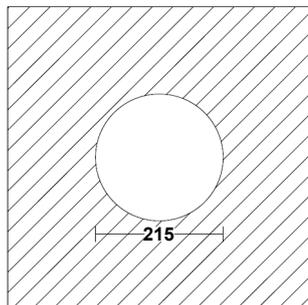

FIXTURE DIMENSIONS

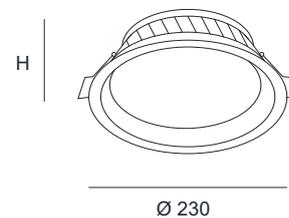

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING