


DOT


SPECIFICATIONS

MOUNTING		INGROUND
POWER	[W]	3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	150
LIGHT COLOUR	[K]	3000
CRI		>80
BEAM ANGLE	[°]	40
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	50
POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP67
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,24
GROSS WEIGHT	[kg]	0,25
COLOUR (HOUSING)		BLACK~RAL9005
COLOUR (HOUSING)		ALU
CUT-OUT	[mm]	Ø40
RECESSED DEPTH (H)	[mm]	90

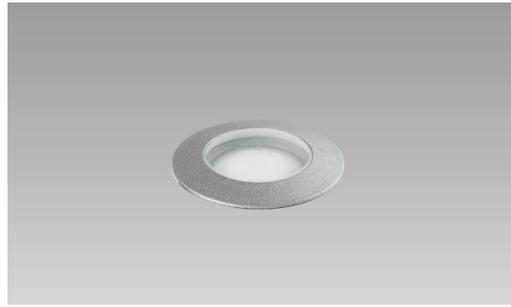

LIGHT DISTRIBUTION


40°

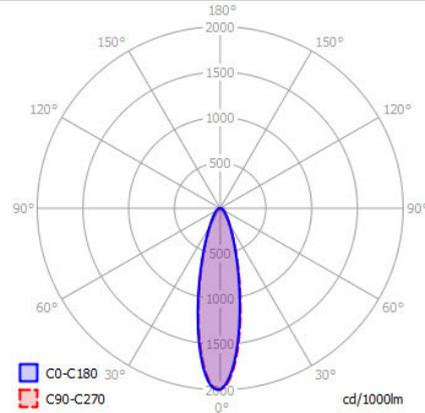

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

MICRO JUNCTION BOX II BLACK




Colours




black

alu

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING