


# WEBSTER 400

## SPECIFICATIONS

MOUNTING		GROUND
POWER	[W]	6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	695
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	115
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,55
GROSS WEIGHT	[kg]	1,60
COLOUR (HOUSING)		GREY ~RAL9006



## LIGHT DISTRIBUTION

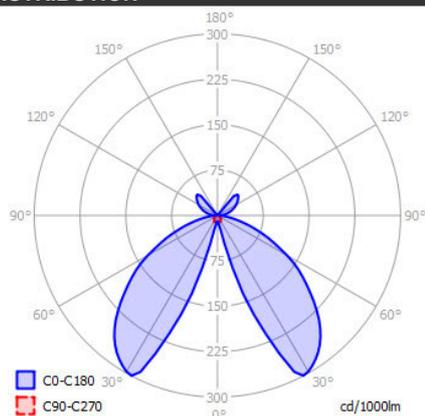

\*Luminous flux values are nominal LED data at a operating temperature of 25° C


## OPTIONS / OPTIONAL ACCESSORIES

### Colours




grey

## MOUNTING DIMENSIONS



## FIXTURE DIMENSIONS

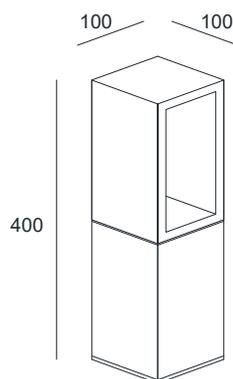

CRI > 90



IP54

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING