

SAXO ON


SPECIFICATIONS

| | | |
|--------------------|---------|----------------------|
| MOUNTING | | WALL |
| POWER | [W] | 2 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 185 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >80 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 92 |
| POWER SUPPLY | [V] [A] | 220-240V AC 50/60 Hz |
| LED-DRIVER | | INCLUDED |
| DIMMING | | NO |
| THROUGH-WIRING | | NO |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP54 |
| PROTECTION CLASS | | I |
| NET WEIGHT | [kg] | 0,34 |
| GROSS WEIGHT | [kg] | 0,35 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

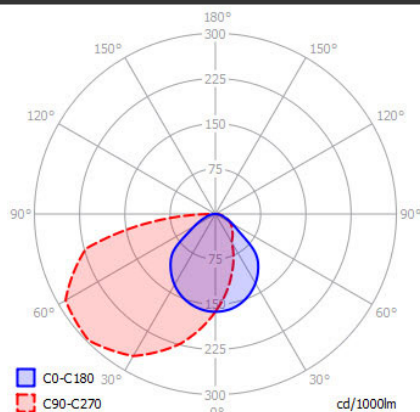


OPTIONS / OPTIONAL ACCESSORIES

Colours




white

MOUNTING DIMENSIONS (DRILLING TEMPLATE)



FIXTURE DIMENSIONS



IP54

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING