

# CLIPPO S P3 DIM TO WARM


## SPECIFICATIONS

<b>MOUNTING</b>		<b>TRACK</b>
POWER	[W]	9,5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	45-915
LIGHT COLOUR	[K]	1910-3000
CRI		>90
BEAM ANGLE	[°]	34 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	96
<b>POWER SUPPLY</b>	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		-
<b>MATERIAL</b>		<b>ALUMINUM</b>
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,40
GROSS WEIGHT	[kg]	0,44
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



## LIGHT DISTRIBUTION

34°

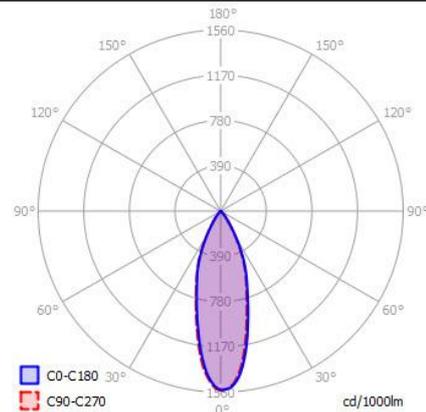

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 48
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



## Colours




white/white

white/gold


black/black

black/gold

## TRACK MOUNTING



## FIXTURE DIMENSIONS

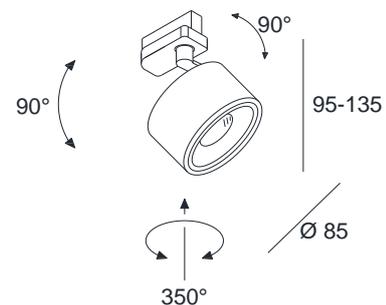

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING

# CLIPPO S P3 2700K


## SPECIFICATIONS

MOUNTING		TRACK
POWER	[W]	9,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1100
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	34 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	118
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		-
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,40
GROSS WEIGHT	[kg]	0,44
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



## LIGHT DISTRIBUTION

34°

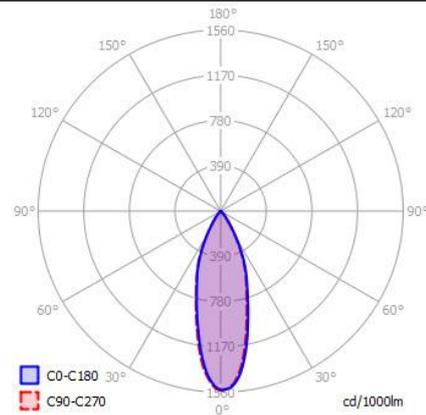

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 48
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



## Colours




white/white

white/gold



black/black

black/gold

## TRACK MOUNTING



## FIXTURE DIMENSIONS

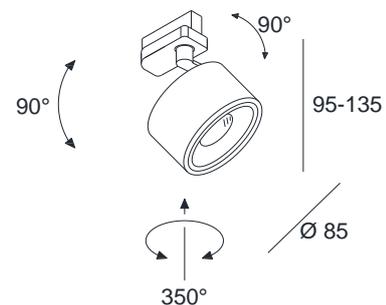

DLS LIGHTING

www.dlslighting.com

**\*DLS**  
LIGHTING