

ARIS

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	6,3
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	625 / 640
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	38
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	101

POWER SUPPLY	[V] [A]	350mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,18
GROSS WEIGHT	[kg]	0,20
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø80
RECESSED DEPTH (H)	[mm]	45

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

38°

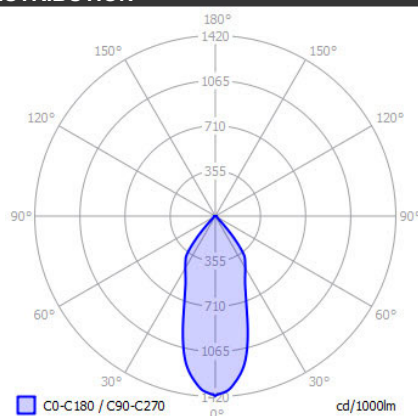

OPTIONS / OPTIONAL ACCESSORIES


Colours




white

black

CUT OUT DIMENSIONS

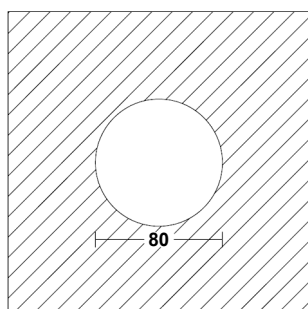

FIXTURE DIMENSIONS



DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING